


## DAFTAR PUSTAKA

- [1] S. Thorat, S. Nayak, and J. P. Dandale, “Facial recognition technology: An analysis with scope in india,” *arXiv preprint arXiv:1005.4263*, 2010.
- [2] Y. Said, M. Barr, and H. E. Ahmed, “Design of a face recognition system based on convolutional neural network (cnn),” *Engineering, Technology & Applied Science Research*, vol. 10, no. 3, pp. 5608–5612, 2020.
- [3] C. C. Cynthia Clara, “Implementasi algoritma local binary pattern dan backpropagation untuk face recognition,” Ph.D. dissertation, Universitas Multimedia Nusantara, 2022.
- [4] V. Vera, “Implementasi algoritma gray level co-occurrence matrix dan backpropagation untuk face recognition,” Ph.D. dissertation, Universitas Multimedia Nusantara, 2022.
- [5] S. Khan, M. H. Javed, E. Ahmed, S. A. Shah, and S. U. Ali, “Facial recognition using convolutional neural networks and implementation on smart glasses,” in *2019 International Conference on Information Science and Communication Technology (ICISCT)*. IEEE, 2019, pp. 1–6.
- [6] S.-C. Hsia, S.-H. Wang, and C.-J. Chen, “Fast search real-time face recognition based on dct coefficients distribution,” *IET Image Processing*, vol. 14, no. 3, pp. 570–575, 2020.
- [7] X. Shen, J. Yang, C. Wei, B. Deng, J. Huang, X.-S. Hua, X. Cheng, and K. Liang, “Dct-mask: Discrete cosine transform mask representation for instance segmentation,” in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2021, pp. 8720–8729.
- [8] C. N. Rao, S. S. Sastry, K. Mallika, H. S. Tiong, and K. Mahalakshmi, “Co-occurrence matrix and its statistical features as an approach for identification of phase transitions of mesogens,” *Int. J. Innov. Res. Sci. Eng. Technol*, vol. 2, no. 9, pp. 4531–4538, 2013.
- [9] J. Deng, J. Guo, N. Xue, and S. Zafeiriou, “Arcface: Additive angular margin loss for deep face recognition,” in *Proceedings of the IEEE/CVF conference on computer vision and pattern recognition*, 2019, pp. 4690–4699.
- [10] S. Patel, P. Kumar, S. Garg, and R. Kumar, “Face recognition based smart attendance system using iot,” *International Journal of Computer Sciences and Engineering*, vol. 6, no. 5, pp. 871–877, 2018.
- [11] K. Hidayati, A. Utomo, and H. Wibawanto, “Pengenalan wajah menggunakan metode local binary pattern (lbp) dan principal component analysis (pca) untuk citra berkualitas buruk,” *e-Proceeding Eng.*, vol. 5, pp. 7928–7938, 2018.

- [12] N. Agarwal and A. Khan, “Application of dct in image processing,” in *Conference Etrasct 14 Proceedings at International Journal of Engineering Research & Technology*, 2014, pp. 185–189.
- [13] S. Suhendri and P. Rahayu, “Metode grayscale co-occurrence matrix (glcm) untuk klasifikasi jenis daun jambu air menggunakan algoritma neural network,” *Journal of Information Technology*, vol. 1, no. 1, pp. 15–22, 2019.
- [14] M. Ramadhani, S. Suprayogi, and H. B. Dyah, “Klasifikasi jenis jerawat berdasarkan tekstur dengan menggunakan metode glcm,” *eProceedings of Engineering*, vol. 5, no. 1, 2018.
- [15] N. Neneng, A. S. Puspaningrum, and A. A. Aldino, “Perbandingan hasil klasifikasi jenis daging menggunakan ekstraksi ciri tekstur gray level co-occurrence matrices (glcm) dan local binary pattern (lbp),” *SMATIKA JURNAL: STIKI Informatika Jurnal*, vol. 11, no. 01, pp. 48–52, 2021.
- [16] F. Y. Nabella, Y. A. Sari, and R. C. Wihandika, “Seleksi fitur information gain pada klasifikasi citra makanan menggunakan hue saturation value dan gray level co-occurrence matrix,” *Jurnal Pengembangan Teknologi Informasi dan Ilmu Komputer e-ISSN*, vol. 2548, p. 964X, 2019.
- [17] M. Elgendi, *Deep learning for vision systems*. Simon and Schuster, 2020.
- [18] S. Saha, “A Comprehensive Guide to Convolutional Neural Networks—the ELI5 way — towardsdatascience.com,” <https://towardsdatascience.com/a-comprehensive-guide-to-convolutional-neural-networks-the-eli5-way-3bd2b1164a53>, [Accessed 03-May-2023].
- [19] “River Trail — intellabs.github.io,” <http://intellabs.github.io/RiverTrail/tutorial/>, [Accessed 03-May-2023].
- [20] S. Ioffe and C. Szegedy, “Batch normalization: Accelerating deep network training by reducing internal covariate shift,” in *International conference on machine learning*. pmlr, 2015, pp. 448–456.
- [21] N. Srivastava, G. Hinton, A. Krizhevsky, I. Sutskever, and R. Salakhutdinov, “Dropout: a simple way to prevent neural networks from overfitting,” *The journal of machine learning research*, vol. 15, no. 1, pp. 1929–1958, 2014.
- [22] “Confusion matrix — scikit-learn.org,” [https://scikit-learn.org/stable/auto\\_examples/model\\_selection/plot\\_confusion\\_matrix.html](https://scikit-learn.org/stable/auto_examples/model_selection/plot_confusion_matrix.html), [Accessed 03-May-2023].
- [23] S. A. Khayam, “The discrete cosine transform (dct): theory and application,” *Michigan State University*, vol. 114, no. 1, p. 31, 2003.

- [24] M. I. Ahmad, N. Mohamad, M. N. M. Isa, R. Ngadiran, and A. M. Darsono, “Fusion of low frequency coefficients of dct transform image for face and palmprint multimodal biometrics,” in *2017 3rd IEEE International Conference on Cybernetics (CYBCONF)*. IEEE, 2017, pp. 1–5.
- [25] J. Heaton, *Introduction to neural networks with Java*. Heaton Research, Inc., 2008.

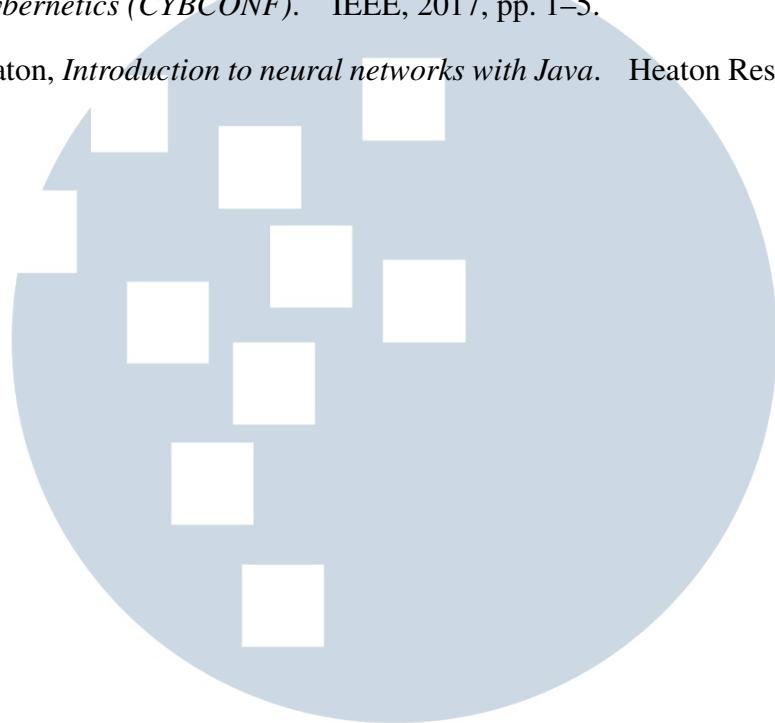

UMN  
UNIVERSITAS  
MULTIMEDIA  
NUSANTARA