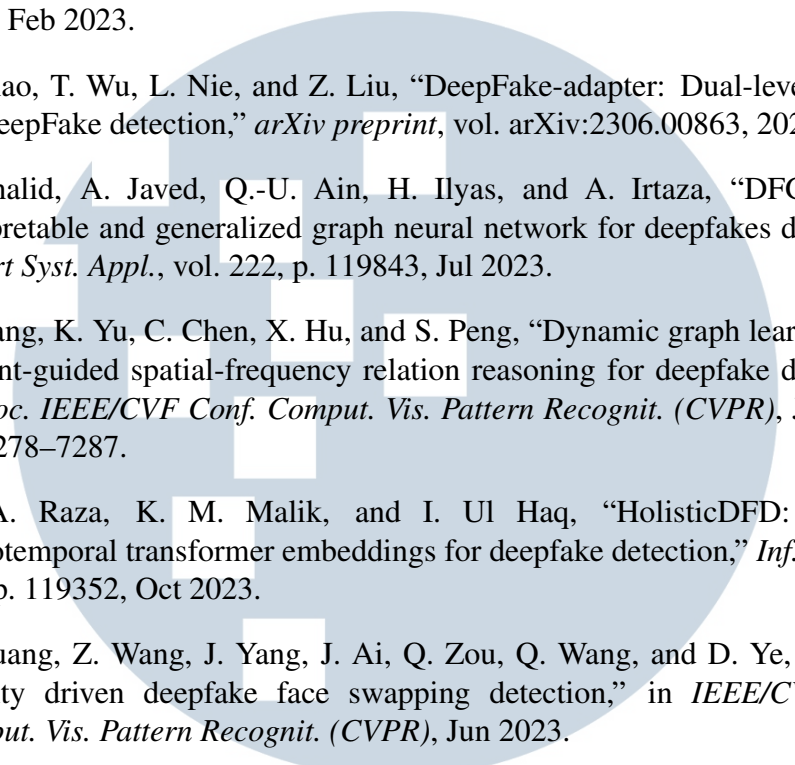


DAFTAR PUSTAKA

- [1] M. S. Rana *et al.*, “Deepfake detection using deep learning,” <https://ieeexplore.ieee.org/stamp/stamp.jsp?arnumber=10711187>, 2022, accessed: 2025-02-12.
- [2] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, “Generative adversarial nets,” in *Advances in Neural Information Processing Systems*, 2014, referensi ini merupakan dasar teoretis yang sangat berpengaruh dalam pengembangan GANs, yang menjadi fondasi utama teknologi deepfake.
- [3] S. Edwards and M. Johnson, “Deepfake detection and analysis: A comprehensive survey,” in *International Conference on Computer Vision and Pattern Recognition*, 2024, pp. 1234–1245.
- [4] A. Dagar, R. Gupta, and S. Kumar, “Deepfake generation and detection: A comprehensive survey,” *Computer Science Review*, vol. 45, p. 100471, 2022.
- [5] V. Tyagi, A. Sharma, and K. Patel, “Analysis of deepfake detection techniques: Challenges and future directions,” *Expert Systems with Applications*, vol. 201, p. 117145, 2023.
- [6] L. Verdoliva, “Deepfake detection: Techniques and challenges,” *Visual Computer*, vol. 39, no. 3, pp. 813–833, 2020.
- [7] Y. LeCun, Y. Bengio, and G. Hinton, “Deep learning,” *Nature*, vol. 521, no. 7553, pp. 436–444, 2015.
- [8] K. He, X. Zhang, S. Ren, and J. Sun, “Deep residual learning for image recognition,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2016, pp. 770–778.
- [9] C. Szegedy *et al.*, “Rethinking the inception architecture for computer vision,” in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition*, 2016, pp. 2818–2826.
- [10] M. Tan and Q. V. Le, “Efficientnet: Rethinking model scaling for convolutional neural networks,” in *Proceedings of the 36th International Conference on Machine Learning*, 2019, pp. 6105–6114.
- [11] D. Cozzolino, A. Pianese, M. Nießner, and L. Verdoliva, “Audio-visual person-of-interest DeepFake detection,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. Workshops (CVPRW)*, Jun 2023, pp. 943–952.
- [12] L. Wang, Y. Zhang, and M. Chen, “Deep learning approaches for deepfake detection: A comprehensive review,” *Pattern Recognition*, vol. 138, p. 109387, 2023.

- [13] H. Wang, X. Li, and Q. Sun, "Si-net: Spatial inconsistency network for deepfake detection," in *Proceedings of the IEEE/CVF Conference on Computer Vision and Pattern Recognition*, 2023, pp. 12 567–12 576.
- [14] T. Zhao, X. Xu, M. Xu, H. Ding, Y. Xiong, and W. Xia, "Istvt: Interpretable spatial-temporal video transformer for deepfake detection," *IEEE Transactions on Information Forensics and Security*, vol. 18, pp. 1335–1348, 2023.
- [15] C. Tian, Z. Luo, G. Shi, and S. Li, "Frequency-aware attentional feature fusion for deepfake detection," in *Proc. IEEE Int. Conf. Acoust., Speech Signal Process. (ICASSP)*, Jun 2023, pp. 1–5.
- [16] Z. Ke, M. Liu, and X. Wang, "Efficientnet-based deepfake detection with attention mechanism," *Multimedia Tools and Applications*, vol. 82, no. 15, pp. 23 567–23 584, 2023.
- [17] T. G. Dietterich, "Ensemble methods in machine learning," in *International Workshop on Multiple Classifier Systems*. Springer, 2000, pp. 1–15.
- [18] F. Chollet, "Xception: Deep learning with depthwise separable convolutions," in *Proceedings of the IEEE Conference on Computer Vision and Pattern Recognition (CVPR)*, 2017, pp. 1251–1258.
- [19] T. M. Mitchell, *Machine Learning*. McGraw-Hill, 1997.
- [20] Y. Bengio, A. Courville, and P. Vincent, "Representation learning: A review and new perspectives," *IEEE Transactions on Pattern Analysis and Machine Intelligence*, vol. 35, no. 8, pp. 1798–1828, 2013.
- [21] D. E. Rumelhart, G. E. Hinton, and R. J. Williams, "Learning representations by back-propagating errors," *Nature*, vol. 323, no. 6088, pp. 533–536, 1986.
- [22] Y. LeCun, L. Bottou, Y. Bengio, and P. Haffner, "Gradient-based learning applied to document recognition," *Proceedings of the IEEE*, vol. 86, no. 11, pp. 2278–2324, 1998.
- [23] L. Breiman, "Bias, variance, and arcing classifiers," *Tech. Rep. 460, Statistics Department, University of California at Berkeley*, 1996.
- [24] G. Brown, J. Wyatt, R. Harris, and X. Yao, "Diversity creation methods: a survey and categorisation," *Information Fusion*, vol. 6, no. 1, pp. 5–20, 2005.
- [25] L. Breiman, "Bagging predictors," *Machine Learning*, vol. 24, no. 2, pp. 123–140, 1996.
- [26] Y. Freund and R. E. Schapire, "A decision-theoretic generalization of on-line learning and an application to boosting," *Journal of Computer and System Sciences*, vol. 55, no. 1, pp. 119–139, 1997.

- [27] D. H. Wolpert, "Stacked generalization," *Neural Networks*, vol. 5, no. 2, pp. 241–259, 1992.
- [28] L. I. Kuncheva, "Combining pattern classifiers: methods and algorithms," 2004.
- [29] H. Ajder, G. Patrini, F. Cavalli, and L. Cullen, "The state of deepfakes: Landscape, threats, and impact," *Deeptrace*, 2019.
- [30] I. Goodfellow, J. Pouget-Abadie, M. Mirza, B. Xu, D. Warde-Farley, S. Ozair, A. Courville, and Y. Bengio, "Generative adversarial nets," *Advances in Neural Information Processing Systems*, vol. 27, 2014.
- [31] L. Verdoliva, "Media forensics and deepfakes: A survey," *IEEE Journal of Selected Topics in Signal Processing*, vol. 14, no. 5, pp. 910–932, 2020.
- [32] B. Dolhansky, J. Bitton, B. Pflaum, J. Lu, R. Howes, M. Wang, and C. C. Ferrer, "The deepfake detection challenge (dfdc) dataset," in *arXiv preprint arXiv:2006.07397*, 2020.
- [33] M. Hossin and M. N. Sulaiman, "A review on evaluation metrics for data classification evaluations," *International Journal of Data Mining & Knowledge Management Process*, vol. 5, no. 2, pp. 1–11, 2015.
- [34] L. Breiman, "Random forests," *Machine Learning*, vol. 45, no. 1, pp. 5–32, 2001.
- [35] S. Hashem, "Optimal linear combinations of neural networks," *Neural Networks*, vol. 10, no. 4, pp. 599–614, 1997.
- [36] S. Ben-David, J. Blitzer, K. Crammer, A. Kulesza, F. Pereira, and J. W. Vaughan, "A theory of learning from different domains," *Machine Learning*, vol. 79, no. 1, pp. 151–175, 2010.
- [37] D. A. McAllester, "Pac-bayesian model averaging," *Proceedings of the Twelfth Annual Conference on Computational Learning Theory*, pp. 164–170, 1999.
- [38] M. Mohri, A. Rostamizadeh, and A. Talwalkar, *Foundations of machine learning*. MIT Press, 2012.
- [39] Y.-J. Heo, W.-H. Yeo, and B.-G. Kim, "DeepFake detection algorithm based on improved vision transformer," *Appl. Intell.*, vol. 53, no. 7, pp. 7512–7527, Apr 2023.
- [40] M. Soleimani, A. Nazari, and M. E. Moghaddam, "Deepfake detection of occluded images using a patch-based approach," *Multimedia Syst.*, vol. 29, no. 5, pp. 2669–2687, Oct 2023.

- 
- [41] S. R. A. Ahmed and E. Sonuç, “Deepfake detection using rationale augmented convolutional neural network,” *Appl. Nanoscience*, vol. 13, no. 2, pp. 1485–1493, Feb 2023.
- [42] R. Shao, T. Wu, L. Nie, and Z. Liu, “DeepFake-adapter: Dual-level adapter for DeepFake detection,” *arXiv preprint*, vol. arXiv:2306.00863, 2023.
- [43] F. Khalid, A. Javed, Q.-U. Ain, H. Ilyas, and A. Irtaza, “DFGNN: An interpretable and generalized graph neural network for deepfakes detection,” *Expert Syst. Appl.*, vol. 222, p. 119843, Jul 2023.
- [44] Y. Wang, K. Yu, C. Chen, X. Hu, and S. Peng, “Dynamic graph learning with content-guided spatial-frequency relation reasoning for deepfake detection,” in *Proc. IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun 2023, pp. 7278–7287.
- [45] M. A. Raza, K. M. Malik, and I. Ul Haq, “HolisticDFD: Infusing spatiotemporal transformer embeddings for deepfake detection,” *Inf. Sci.*, vol. 645, p. 119352, Oct 2023.
- [46] B. Huang, Z. Wang, J. Yang, J. Ai, Q. Zou, Q. Wang, and D. Ye, “Implicit identity driven deepfake face swapping detection,” in *IEEE/CVF Conf. Comput. Vis. Pattern Recognit. (CVPR)*, Jun 2023.
- [47] G. Pang, B. Zhang, Z. Teng, Z. Qi, and J. Fan, “MRE-Net: multi-rate excitation network for deepfake video detection,” *IEEE Trans. Circuits Syst. Video Technol.*, vol. 33, no. 8, pp. 3663–3676, Aug 2023.

